

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106


1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client : Protecta Group Pty Ltd 13 Rachael Close Silverwater NSW 2128

Test Number	:	23-001278
Issue Date	:	5/04/2023
Print Date	:	11/04/2023

Sample Description	Clients Ref : "Bubble	Board Xtra - BUB	X223-GY"		
	Semi-rigid panel with felt backing				
	Colour : Grey				
	End Use : Floor Protection				
	Nominal Composition :	Polypropylene			
	Nominal Mass per Unit Area/Density : 1000g/m2				
	Nominal Thickness :	3mm			

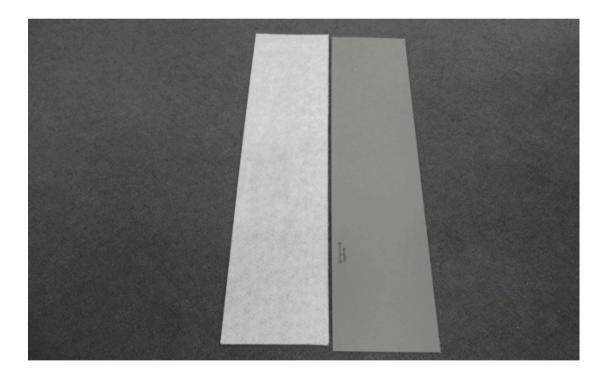

292933

63836

C Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

Dula

Fiona McDonald



Page 1 of 2

MICHAEL A. JACKSON B.Sc.(Hons)

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client :	Protecta Group Pty Ltd	Test Number	:	23-001278
	13 Rachael Close	Issue Date	:	5/04/2023
	Silverwater NSW 2128	Print Date	:	11/04/2023

AS ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival	31-03-2023				
Date Tested	04-04-2023				
CHF Value Non Directional	1 3.3	2 3.3	3 3.8	Mean 3.5	kW/m²
HF-30 Value Non Directional	1 6.8	2	3	Mean -	kW/m²
Smoke Value Non Directional	1 25	2 55	3 3	Mean 28	%.min
Observations: Melting				Yes	

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

No directional properties, three specimens tested only.

292933

63836

C Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

Fiona McDonald APPROVED SIGNATORY





Page 2 of 2

MICHAEL A. JACKSON B.Sc.(Hons)